


Pass & Seymour/Legrand NEMA Configuration Table

NEMA Straight Blade Devices										
	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG
	2 Pole, 2 Wire Grounding	125V 00113 (CI) 1-15R								
2 Pole, 3 Wire Grounding	125V									
	250V			2-20						
	277VAC									
3 Pole, 3 Wire Non-Grounding	125/250V									
	125/250V									
	3ø250V									
3 Pole, 4 Wire Grounding	125/250V									
	3ø250V									
	3øY 120/208V									
4 Pole, 4 Wire Non-Grounding	125/250V									
	3øY 120/208V									
	3øY 250V (600V)									
4 Pole, 5 Wire Grounding	125/250V									
	3øY 120/208V									
	3øY 250V (600V)									



NEMA Turnlok® Devices										
	15 AMPERE		20 AMPERE		30 AMPERE		Voltage	Grounding	Poles	Notes
	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG				
	2 Pole, 2 Wire Non-Grounding	L1-15R	L1-15P							
2 Pole, 3 Wire Grounding	L2-20R	L2-20P					250V	2 Pole, 3 Wire	Grounding	
	L5-15R	L5-15P	L5-20R	L5-20P	L5-30R	L5-30P	125V	2 Pole, 3 Wire	Grounding	
	L6-15R	L6-15P	L6-20R	L6-20P	L6-30R	L6-30P	250V	2 Pole, 3 Wire	Grounding	
2 Pole, 3 Wire Non-Grounding	L7-15R	L7-15P	L7-20R	L7-20P	L7-30R	L7-30P	277V	2 Pole, 3 Wire	Non-Grounding	
	L8-20R	L8-20P	L8-30R	L8-30P			480V	2 Pole, 3 Wire	Non-Grounding	
	L9-20R	L9-20P	L9-30R	L9-30P			600V	2 Pole, 3 Wire	Non-Grounding	
3 Pole, 3 Wire Non-Grounding	L10-20R	L10-20P	L10-30R	L10-30P			125/250V	3 Pole, 3 Wire	Non-Grounding	
	L11-20R	L11-20P	L11-30R	L11-30P			3ø250V	3 Pole, 3 Wire	Non-Grounding	
	L12-20R	L12-20P	L12-30R	L12-30P			3ø480V	3 Pole, 3 Wire	Non-Grounding	
3 Pole, 4 Wire Grounding	L13-30R	L13-30P					3ø600V	3 Pole, 4 Wire	Grounding	
	L14-20R	L14-20P	L14-30R	L14-30P			125/250V	3 Pole, 4 Wire	Grounding	
	L15-20R	L15-20P	L15-30R	L15-30P			3ø250V	3 Pole, 4 Wire	Grounding	
3 Pole, 4 Wire Non-Grounding	L16-20R	L16-20P	L16-30R	L16-30P			3ø480V	3 Pole, 4 Wire	Non-Grounding	
	L17-30R	L17-30P					3ø600V	3 Pole, 4 Wire	Non-Grounding	
	L18-20R	L18-20P	L18-30R	L18-30P			3øY 120/208V	3 Pole, 4 Wire	Non-Grounding	
4 Pole, 4 Wire Non-Grounding	L19-20R	L19-20P	L19-30R	L19-30P			3øY 277/480V	4 Pole, 4 Wire	Non-Grounding	
	L20-20R	L20-20P	L20-30R	L20-30P			3øY 347/600V	4 Pole, 4 Wire	Non-Grounding	
	L21-20R	L21-20P	L21-30R	L21-30P			3øY 120/208V	4 Pole, 4 Wire	Non-Grounding	
4 Pole, 5 Wire Grounding	L22-20R	L22-20P	L22-30R	L22-30P			3øY 277/480V	4 Pole, 5 Wire	Grounding	
	L23-20R	L23-20P	L23-30R	L23-30P			3øY 347/600V	4 Pole, 5 Wire	Grounding	

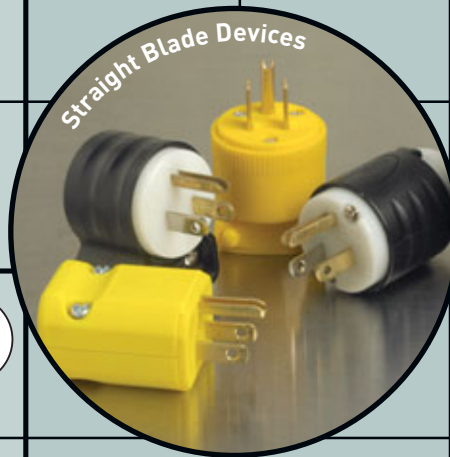

Non-NEMA Locking Devices												
	14 AMPERE		15 AMPERE		15 (10) AMPERE		20 AMPERE		20 (10) AMPERE		30 AMPERE	
	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG	RECEPT	PLUG
	3 Wire Grounding and Non-Grounding											
3 Wire Grounding and Non-Grounding	125V											
	125V (250V)											
	125/250V											
4 Wire Grounding and Non-Grounding	250V											
	125-480V											
	3øY 120/208V											
4 Wire Grounding and Non-Grounding	3øY 250V (600V)											
	3øY 250/600V											

50 Amp Locking Devices			
RECEPT	PLUG	Voltage	Grounding
CR3370 (SR) CR3360 (CI)	CR3361 (PI) CR3377 (FI)	125V CORROSION RESISTANT	2 Pole, 2 Wire
CS6370 (SR) CS6360 (CI)	CS6361 (PI) CS6377 (FI)	125V CALIFORNIA STANDARD	2 Pole, 3 Wire
CS8269 (SR) CS8264 (CI)	CS8265 (PI) CS8275 (FI)	250V CALIFORNIA STANDARD	2 Pole, 3 Wire
CS8469 (SR) CS8464 (CI)	CS8465 (PI) CS8475 (FI)	480V CALIFORNIA STANDARD	2 Pole, 3 Wire
3771 (SR) 3762 (CI)	3763-M (PI) 3777 (FI)	600VAC/ 250VDC CORROSION RESISTANT	2 Pole, 3 Wire
CR6369 (SR) CR6364 (CI)	CR6365 (PI) CR6375 (FI)	125/250V CORROSION RESISTANT	3 Pole, 4 Wire
CS6369 (SR) CS6364 (CI)	CS6365 (PI) CS6375 (FI)	125/250V CALIFORNIA STANDARD	3 Pole, 4 Wire
CS8269 (SR) CS8264 (CI)	CS8265 (PI) CS8275 (FI)	3ø250V CALIFORNIA STANDARD	3 Pole, 4 Wire
CS8169 (SR) CS8164 (CI)	CS8165 (PI) CS8175 (FI)	3ø480V CALIFORNIA STANDARD	3 Pole, 4 Wire
3769 (SR) 3764 (CI)	3765 (PI) 3775 (FI)	600VAC/ 250VDC CORROSION RESISTANT	3 Pole, 4 Wire
*7279 (SR) *7764 (CI)	*7765 (PI) *7766 (FI)	600VAC/ 250VDC CORROSION RESISTANT	3 Pole, 4 Wire

Angle Adapters			
15 AMPERE	20 AMPERE	30 AMPERE	Notes
EHU15AN	EHU15AN		EHU, 3 Wire
L15-AN	L20303-AN	L20303-AN	Turnlok, 3 Wire
	L203045-AN	L203045-AN	Turnlok, 4 & 5 Wire

Midget Locking Devices			
15 AMPERE		Voltage	Grounding
RECEPT	PLUG		
ML1R	ML1P	125V	2 Pole, 2 Wire Non-Grounding
ML2R	ML2P	125V	2 Pole, 3 Wire Grounding
ML3R	ML3P	125/250V	3 Pole, 3 Wire Non-Grounding

Straight Blade/ Locking Adapters		Key
15 AMPERE	2 Pole, 3 Wire Grounding	
5-15R	5-15P	SR Single Receptacle
		DR Duplex Receptacle
		C Connector
		P Plug
		AP Angle Plug
		AN Angle Adapter
		FI Flanged Inlet
		FO Flanged Outlet
		X, Y, Z Hot Lead
		W Neutral Lead
		G Grounding Lead